


www.osiyagroup.com



**OUTDOOR
LED SCREEN**

P4

[View Packages Online](#)

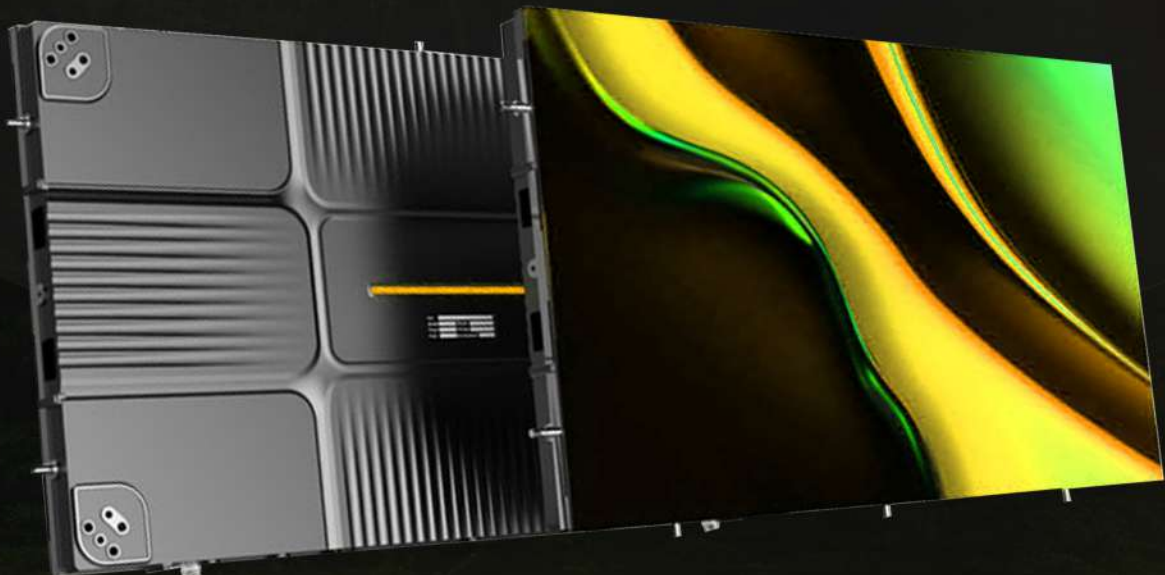

INDUSTRIAL APPLICATIONS

**OUTDOOR
LED SCREEN**

P4

Stadium



Billboards & DOOH



Mall & Retail



Real Estate




**OSIYA
GROUP**

www.osiyagroup.com

**OUTDOOR
LED SCREEN**

P4

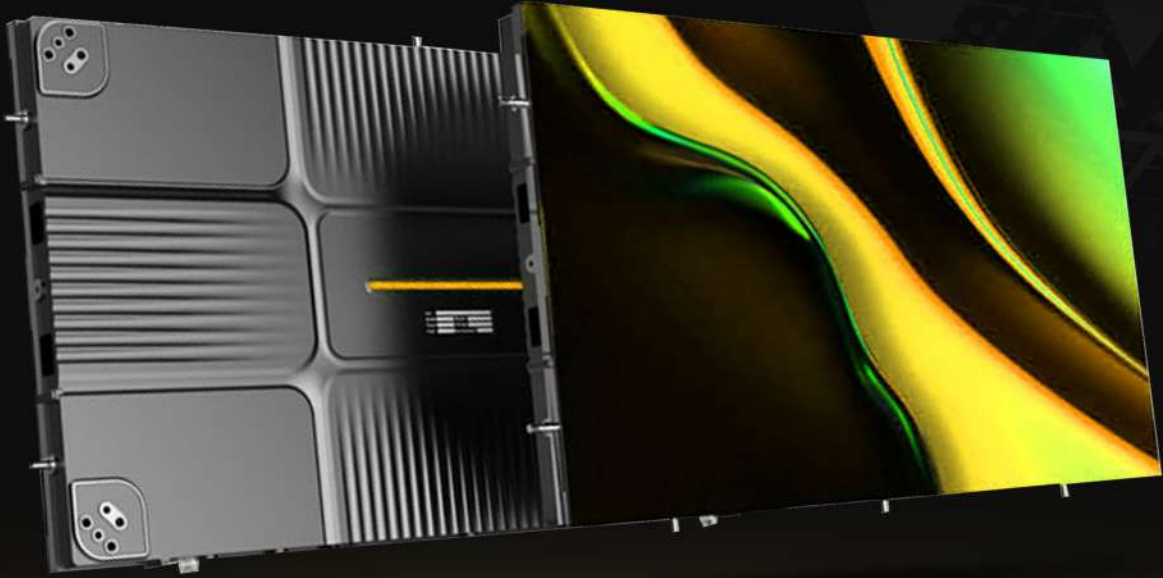

www.osiyagroup.com

[Watch Video P4](#)



Industry Leading
Quality Components



24 Months Warranty
For All Parts



8K

**Upto 8k
Resolution**



**Brightness
upto 5500
Nits**



**Refresh
Rate Upto
3840hz**



**Custom
Crafted
Cabinet**



**Upto 7 Years
Extended
Warranty**


POWER SUPPLY

Slim bar with noiseless technology.



RECEIVING CARD

NovaStar supports various functions such as color management, 18Bit+, pixel level brightness and chroma calibration, individual Gamma adjustment for RGB, and 3D.

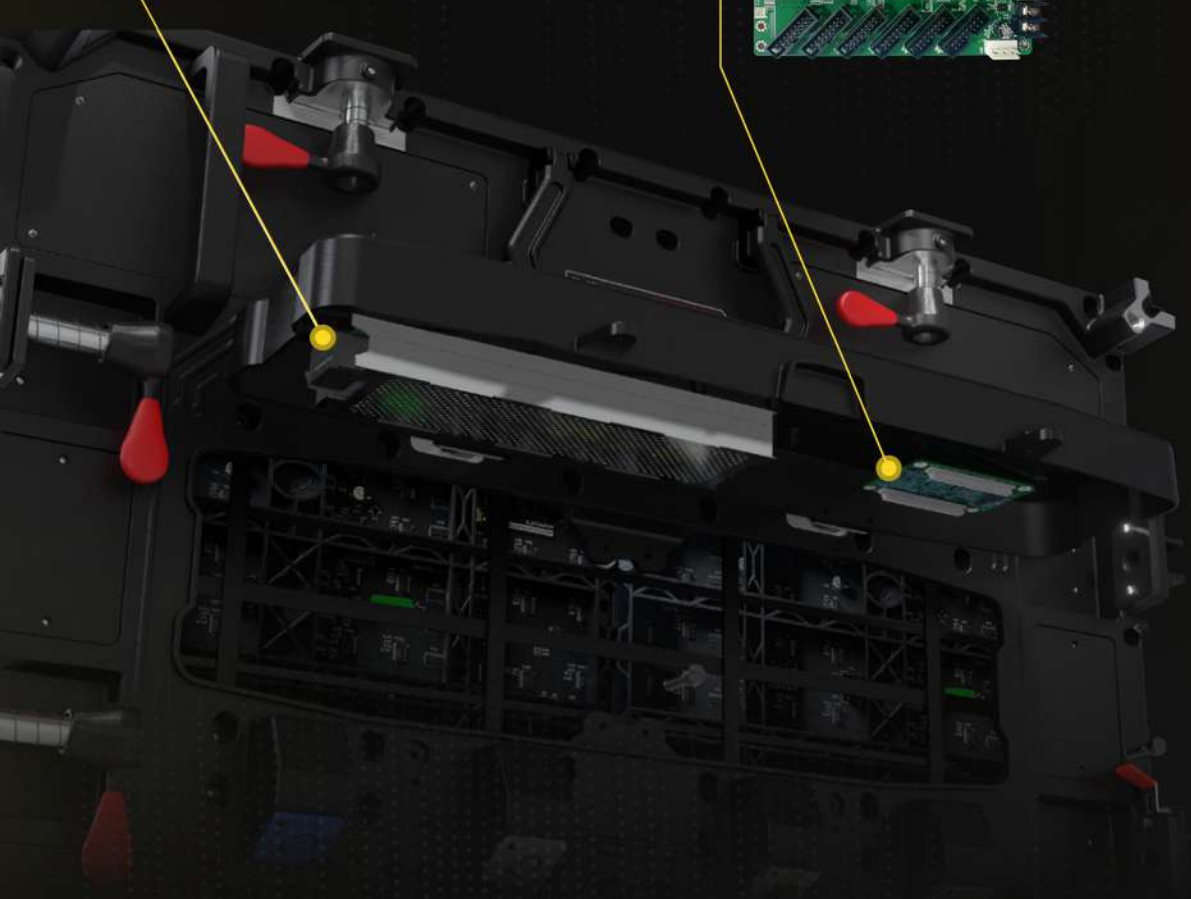

Minimum Viewing Distance

[Watch Video](#)

Optical Range

Pixel Pitch (MM)

| | | | | | | |
|-------|--------|--------|--------|--------|--------|--------|
| 8 ft. | 10 ft. | 13 ft. | 17 ft. | 20 ft. | 27 ft. | 33 ft. |
| P2.5 | P3 | P4 | P5 | P6 | P8 | P10 |

COMPATIBLE SUPPORTS

[Watch Video](#)



WALL MOUNTABLE

It is the most common support and above all the most stable considering the type of construction where it is mounted, since it is screwed through the holes included in our panels.



TRUSS SYSTEMS

Manufactured with heavy-duty aluminum material, ideal for overhead truss system, a ceiling grid, a crane, or other support structure from above.



GROUND SUPPORT

Bar and ladder truss that creates a stable system to support your screen in various configurations well as width.

FRONT SERVICEABLE

Easily removable magnetic module system to simplify assembly, repair or replacement of components. They can be removed with a special tool or manually.



BACK SERVICEABLE

The rear cover features latches that are easy to open manually, which makes it expedited to maintain all of the LED panel components.



Technical Specification

| | |
|-------------------------------------|-----------------------|
| LED Type | SMD |
| Pixel Pitch (mm) | 4.0 |
| Module Resolution (W*H) | 80*40 |
| Module Dimension (mm) | 320(W)* 160(H)* 15(D) |
| Module Flatness (mm) | <0.15 |
| Pixel/m ² | 62,500 |
| Servicing | REAR |
| Back shell | Plastic |
| Cabinet Size (W x H, mm) | Customizable |
| Cabinet Weight (KG/m ²) | <35KGS |

Optical Parameters

| | |
|-----------------------------------|----------------------|
| Single-dot Brightness Calibration | Available |
| Single-dot Color Calibration | Available |
| Brightness (nits) | ≥4500 |
| Colour Temperature (K) | 1000-9500 Adjustable |
| Viewing Angle | 160° |
| Brightness/Colour Uniformity | ≥97% |
| Contrast Ratio | 5000:1 |
| Scan Rate | 20 |

Electrical Parameters

| | |
|---|------------------------------|
| Max Power Consumption (W/m ²) | ≤800 |
| Average Power Consumption (W/m ²) | ≤235 |
| Input Power Voltage | AC110-220V ± 15%, 50/60 (Hz) |

Processing Parameters

| | |
|---------------------|---------------------------------------|
| Drive Mode | Constant Current Drive (Common anode) |
| Frame Rate (Hz) | 50-60 |
| Refresh Rate (Hz) | 3840 Hz |
| Colour Depth (bits) | 16 |

Operational Parameters

| | |
|-------------------------|----------|
| Life span, typ. (Hrs) | 1,00,000 |
| Operating Temp (°C) | -20-60 |
| Storage Temp (°C) | -20-60 |
| Operating Humidity (RH) | 10-90% |
| Storage Humidity (RH) | 10-90% |

www.osiyagroup.com



30+ Year
Experience



65+ Cities
Served



Made
in India



1000+LED
Screen Installed



🌐 <https://osiyagroup.com/>

✉️ harsh@osiyagroup.com

☎️ 9669618111

📱 @osiyagroup

📍 241/4 Kailod Hala, behind Hotel Fagun, Sda Compound, Lasudia Mori, Indore, Madhya Pradesh 452001

NOVA STAR | OFFICIAL DISTRIBUTOR

